

Fresh Start Heated Shower Set Up Instructions

Shower Setup Instructions:


Remove box with Heater and all Hardware from inside Shower.

{Check Heater for damage such as dents, scratches, broken hose connections etc....}.


Mount Hot Water Heater on back of Shower.

Connect Hoses to Heater. **Black** is Gas in to Heater. **Red** is hot out to Shower. **Blue** is cold out to Shower. Water service line to Heater goes in left side of Y shaped adapter.

{See picture below}.

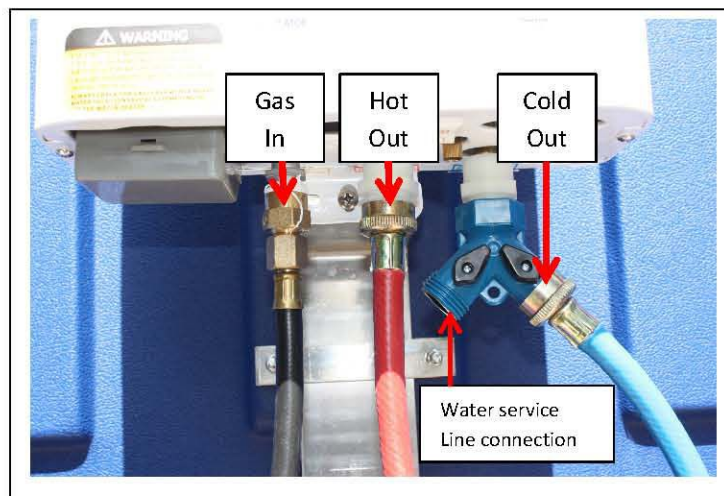


Connect Hot and Cold water hoses to back of shower. **Blue** is cold goes on left. **Red** is hot goes on right. **{See picture below}**.

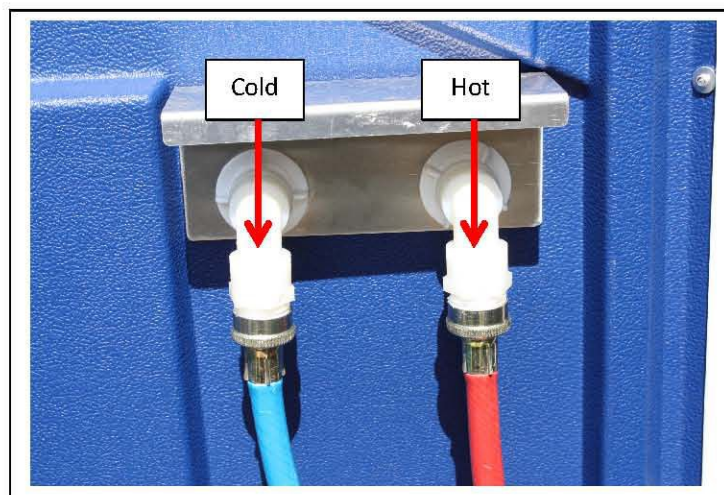

Connect the other end of Black Gas Line to Gas Tank/Service and turn Gas on.

Install 2 D size batteries in Heater. {Batteries not included}. Turn on water supply. Turn Power Switch on. Set Gas and Water Regulators to Max. **{See picture below}**.

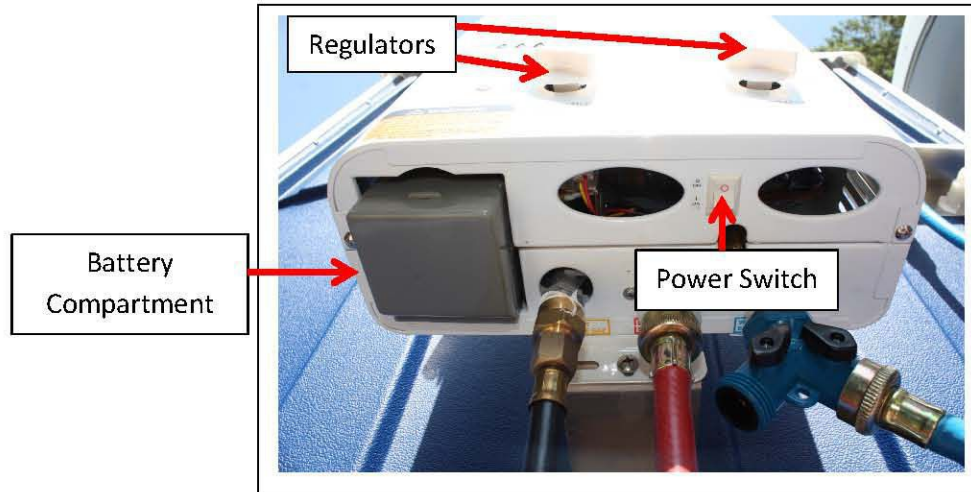

Check all outside water/gas connections for leaks.

Check inside Shower for leaks. With hot and cold water knobs in the on & off position check around knobs, hose connections, and Shower Head for leaks.

Run hot water for min. 2 minutes to confirm that Water Heater is supplying continuous hot water. Check that cold water knob works.

FOR UTILIZING SHOWER DRAIN, there are two (one each on right and left sides of the skid) 1-1/4" female NPT threaded fittings that are provided on the 12-gallon containment skid that allows gray water to be piped away to an exterior holding tank or sewer system.